

DS-T201



Key Features

- 2 Megapixel high-performance CMOS
- Analog HD output, up to 1080P resolution
- True Day/Night, Smart IR
- Up to 20m IR distance

Specification


Model	DS-T201
Parameter	Turbo HD1080p IR Dome Camera
Camera	
Image Sensor	2MP CMOS Image Sensor
Signal System	PAL/NTSC
Effective Pixels	1920(H)*1080(V)
Min. Illumination	0.01 Lux @ (F1.2,AGC ON),0 Lux with IR
Shutter Time	1/25(1/30) s to 1/50,000 s
Lens	2.8mm, 3.6mm, 6mm optional
	Angle of View: 103°(2.8mm), 82.2°(3.6mm), 54°(6mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 350°, Tilt: 0 - 70°, Rotation: 0 - 350°
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	1080p@25fps/1080p@30fps
HD Video Output	1 Analog HD output
S/N Ratio	> 62dB
General	
Working	-20 °C - 45 °C (-4 °F - 113 °F)

Temperature/Humidity	Humidity 90% or less (non-condensing)
Power Supply	12V DC±15%
Power Consumption	Max. 4W
IR Range	Up to 20m
Dimension	Φ 98 x 65.4 mm (φ 3.86" x 2.57")
Weight	130 g (0.29 lb)

Order Model

DS-T201

Dimension

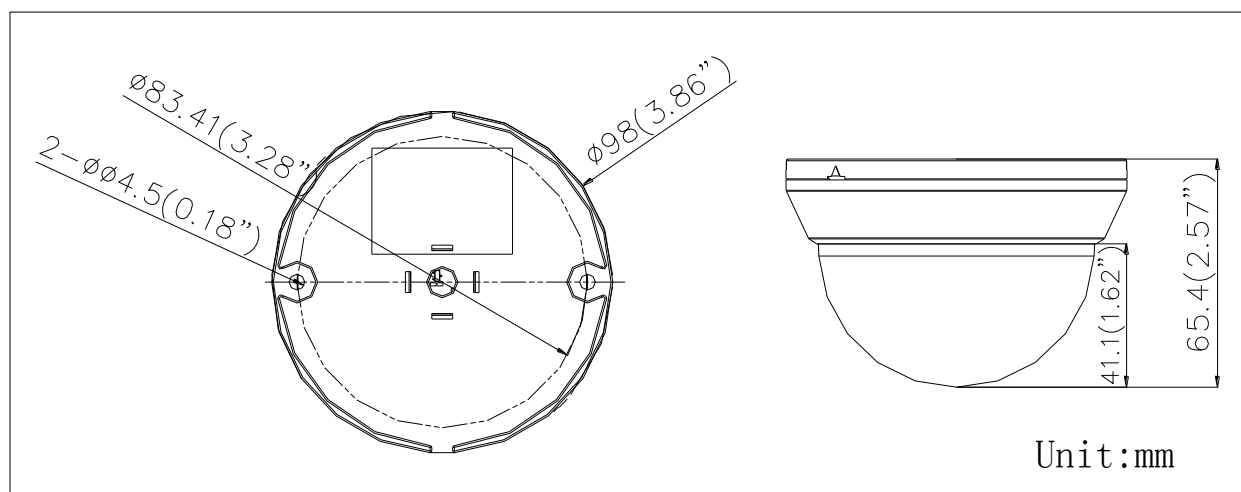

Accessory



DS-1H33
Video Balun



DS-TT-X41T
TVI Tester